

TEAK OIL

For the treatment and enhancement of untreated wood, including hardwood.
Ideal for garden furniture or traditional matt finished interior furniture.

R3

PREPARATION / APPLICATION

Ensure that the surface to be treated is clean and dry, and free from varnish, paint, wax etc. Apply Barretine Teak Oil by using a lint free cloth or brush, removing excess after 15 minutes. Reapply after 24 hours as necessary. NOT recommended for use on oak.

AFTER USE

IMMEDIATELY AFTER USE SATURATE ALL SOILED APPLICATION CLOTHS WITH WATER AND DISPOSE OF SAFELY OUTSIDE THE HOME AS OILY CLOTHS CAN SELF COMBUST. Clean brush with Barretine White Spirit. Replace cap firmly to prevent oil deteriorating. Store at >5°C but away from heat sources.

HEALTH & SAFETY

Flammable liquid and vapour • May be fatal if swallowed and enters airways

- May cause drowsiness or dizziness
- Keep out of reach of children
- Keep away from heat, hot surfaces, sparks, open flames and other ignition sources.

No smoking • Avoid breathing fume, vapours, mist, spray • Use only outdoors or in a well-ventilated area • Store in a well-ventilated place. Keep container tightly closed • Dispose of contents/container in accordance with local/ regional/national/international regulations • Repeated exposure may cause skin dryness or cracking.


Contains: Hydrocarbons, C9-C11, n-alkanes, isoalkanes, cyclics, <2% aromatics



Very High: VOC content >50%
VOCs (Volatile Organic Compounds) Contribute to atmospheric pollution.

5litre e

UN No. 1263

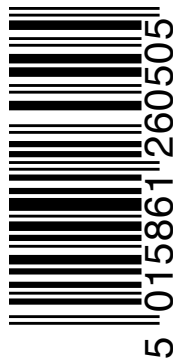

Barretine

St. Ivel Way, Warmley, Bristol BS30 8TY.

T: +44 (0) 117 960 0060

F: +44 (0) 117 935 2437

E: sales@barretine.co.uk

www.barretinePro.co.uk

Group website: www.barretine.co.uk